



BASKET STRAINER ASSEMBLY

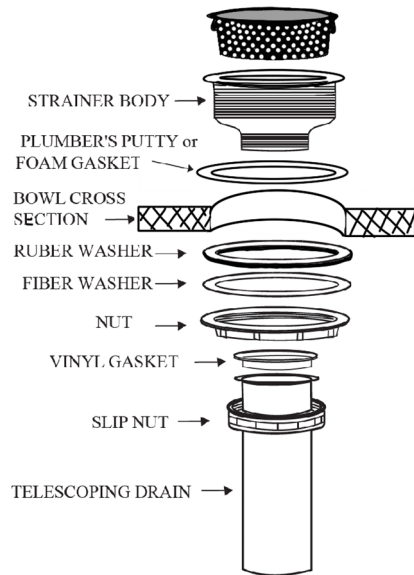

Sioux Chief 290-20320 No-Putty Gasket for Strainer

1. Remove all components from strainer body
2. Remove the gasket backer material and adhere to the underside of the strainer basket flange.
3. Insert the strainer body through the drain hole.
4. Hold strainer body in place while placing thick rubber and fiber washers around strainer body, and then thread nut onto strainer body. Tighten securely using basin wrench.
5. Place vinyl or rubber gasket in flanged top of tailpiece and thread slip nut onto threaded shank of strainer body. Tighten securely.


BASKET STRAINER ASSEMBLY

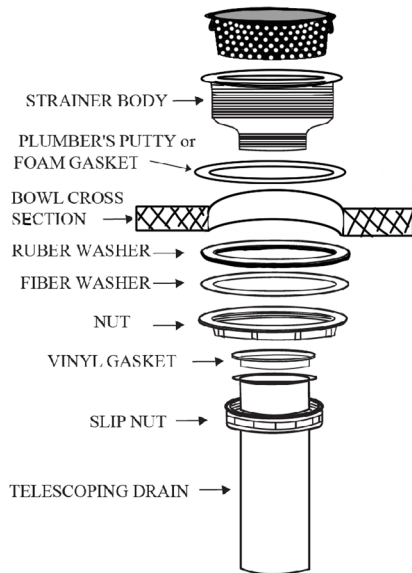

Sioux Chief 290-20320 No-Putty Gasket for Strainer

1. Remove all components from strainer body
2. Remove the gasket backer material and adhere to the underside of the strainer basket flange.
3. Insert the strainer body through the drain hole.
4. Hold strainer body in place while placing thick rubber and fiber washers around strainer body, and then thread nut onto strainer body. Tighten securely using basin wrench.
5. Place vinyl or rubber gasket in flanged top of tailpiece and thread slip nut onto threaded shank of strainer body. Tighten securely.

BASKET STRAINER ASSEMBLY

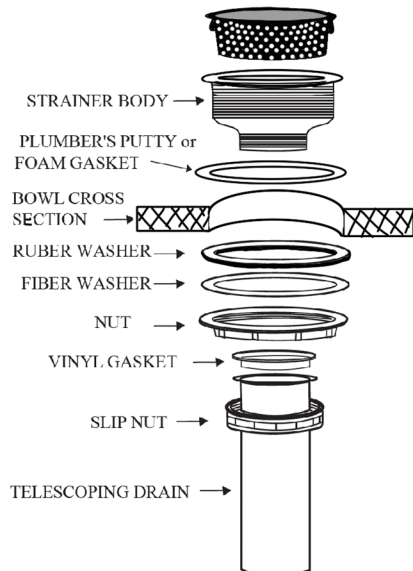

Sioux Chief 290-20320 No-Putty Gasket for Strainer

1. Remove all components from strainer body
2. Remove the gasket backer material and adhere to the underside of the strainer basket flange.
3. Insert the strainer body through the drain hole.
4. Hold strainer body in place while placing thick rubber and fiber washers around strainer body, and then thread nut onto strainer body. Tighten securely using basin wrench.
5. Place vinyl or rubber gasket in flanged top of tailpiece and thread slip nut onto threaded shank of strainer body. Tighten securely.