
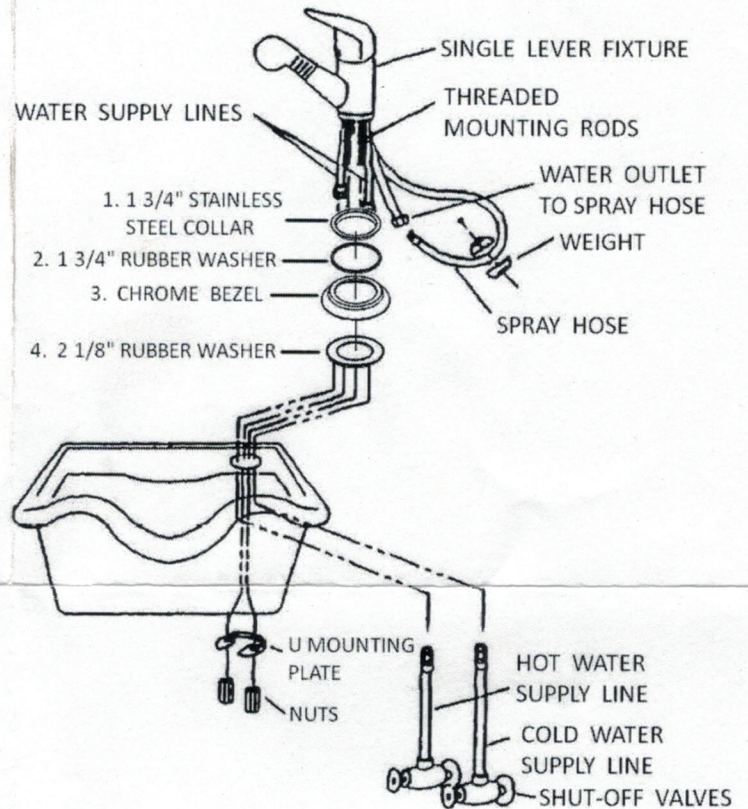
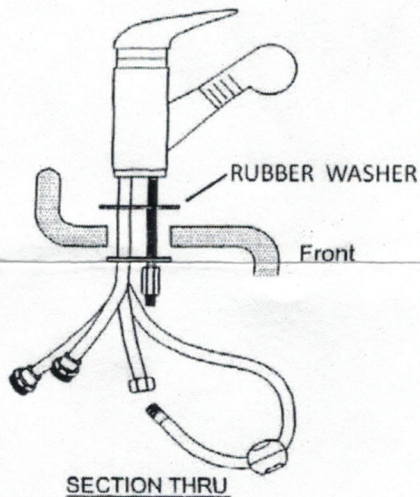


L1014U

(800 FIXTURE INSTALLATION INSTRUCTIONS)

PULL-OUT SINGLE LEVER FAUCET WITH BUILT-IN VACUUM BREAKER

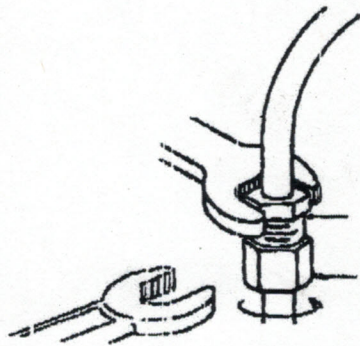

FAUCET INSTALLATION

Note: Install the faucet prior to mounting the bowl

Insert fixture and hoses through top of the bowl with the rubber washer making contact with the bowl surface.

From underneath, slide the U-shaped mounting plate onto the threaded mounting rods and tighten securely.

Attach end of spray hose to the water supply outlet on the fixture.

Attach hot and cold water supply lines to the faucet.

Attach the weight to the spray hose near the bottom of the loop.

Use these parts for installation on bowls with fixture holes larger than 2" in diameter.

1. Install 1 3/4" Stainless Steel Collar first
2. Install small 1 3/4" rubber washer next as shown.
3. Install Chrome Bezel
4. Install 2 1/8" rubber washer

Assemble all parts to the bottom of the fixture then install the hoses, including the spray hose through the fixture hole on the bowl. Install the brass horseshoe washer and secure using the brass hex nuts.